

### REMARKS

By the present Amendment, claims 1-9 are cancelled and claims 10-15 are added. This leaves claims 10-15 pending in the application, with claim 10 being independent.

Also submitted herewith is a substitute declaration to correct the spelling of the name of inventor Walter Dorr.

#### Substitute Specification

The specification is revised to eliminate grammatical and idiomatic errors in the originally presented specification. The number and nature of the changes made in the specification would render it difficult to consider the case and to arrange the papers for printing or copying. Thus, the substitute specification will facilitate processing of the application. The substitute specification includes no "new matter". Pursuant to M.P.E.P. § 608.01(q), voluntarily filed, substitute specifications under these circumstances should normally be accepted. A marked-up copy of the original specification is appended hereto.

#### Rejections Under 35 U.S.C. § 102 and § 103

New claim 10 combines the limitations of original claims 1, 3, 4, and 6 to constitute original claim 6 rewritten in independent form including all of the limitations of the base claim and the intervening claims. Since original claim 6 is indicated as being allowable if so rewritten, claim 10 and the claims dependent thereon should be allowable. The record will not be burdened with a comparison of the claims and the cited patents.

In view of the foregoing, claims 10-15 are allowable. Prompt and favorable action is solicited.

Respectfully submitted,

A handwritten signature in cursive script, reading "Mark S. Bicks", written over a horizontal line.

Mark S. Bicks  
Reg. No. 28,770

Roylance, Abrams, Berdo & Goodman, L.L.P.  
1300 19th Street, N.W., Suite 600  
Washington, D.C. 20036  
(202) 659-9076

Dated: March 7, 2007

~~(12)~~ **INTERNATIONAL APPLICATION PUBLISHED UNDER  
THE PATENT COOPERATION TREATY (PCT)**

~~(19)~~ World Intellectual Property Organization ~~[WIPO]~~ ~~[Bar Code]~~  
~~International Bureau~~

~~(43)~~ International Publication Date ~~March 17, 2005 (03/17/2005)~~ ~~(10)~~ International Publication Number  
~~PCT~~ **WO 2005/024244 A1**

<p><del>(51)</del> International Patent Classification<sup>7</sup>: <b>F15B 1/22</b>, F16L 55/055, G05D 7/01</p> <p><del>(21)</del> International Application No.: PCT/EP2004/005451</p> <p><del>(22)</del> International Filing Date: May 21, 2004 (05/21/2004)</p> <p><del>(25)</del> Language in which the international application was originally filed: German</p> <p><del>(26)</del> Language in which the international application is published: German</p> <p><del>(30)</del> Priority Data: 103 37 744.1 August 13, 2003 (08/13/2003) DE</p>	<p><del>(71)</del> Applicant <del>(for all designated states except the U.S.):</del> <b>HYDAC TECHNOLOGY GMBH</b> [DE/DE]; Industriegebiet, 66280 Sulzbach/Saar (DE).</p> <p><del>(72)</del> Inventor, and</p> <p><del>(75)</del> Inventor/Applicant <del>(U.S. only):</del> <b>BALTES, Herbert</b> [DE/DE]; Bornstrasse 22, 66679 Losheim (DE); <b>DORR, Walter</b> [DE/DE]; Jupiterstrasse 32, 66333 Völklingen (DE).</p> <p><del>(74)</del> Representative: <b>BARTELS AND PARTNER</b>; Lange Strasse 51, 70174 Stuttgart (DE).</p> <p><del>(81)</del> Designated States <del>(unless indicated otherwise, for each available type of national protective right):</del> AE, AG;</p> <p align="right"><del>[continued on next page]</del></p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

~~(54)~~ Title: **50246**

Patent Application

of


HERBERT BALTES

and

WALTER DORR

for

DEVICE FOR DAMPING WATER HAMMER

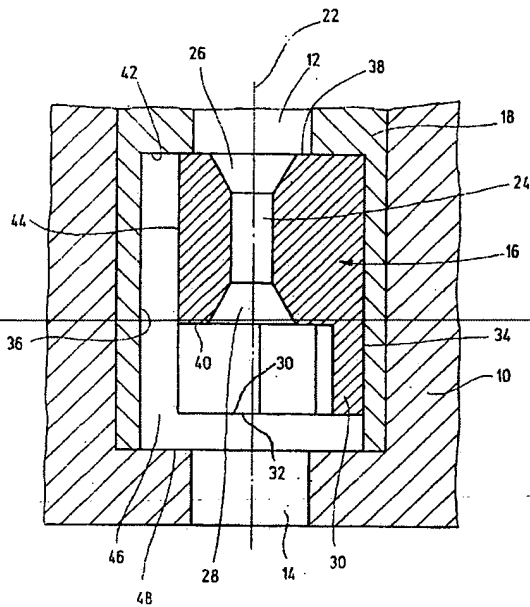

(57) Abstract: The invention relates to a device for damping water hammers in hydraulic accumulators, in particular in piston accumulators, which is embodied in the form of the accumulator component which operates as a throttle on a fluid flow and is inserted between internal elements (12) of the accumulator and a hydraulic network (14) to which said accumulator is connectable, the throttle being formed by at least one transfer area (24) having a predetermined cross-section in a valve element (16) which, interrupts the fluid flow up to the transfer area (24) at one of the valve positions and releases it at the other position thereof. Said invention is characterised in that the respective transfer area (24) has at least one free end and a funnel-shaped enlargement (26, 28) is oriented towards the inside of the accumulator (12) or towards the hydraulic network (14), thereby making it possible to substantially improve known damping devices in such a way that noise emission is reduced to the greatest possible extent.

[Fortsetzung auf der nächsten Seite]

AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY,  
BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,  
VN, YU, ZA, ZM, ZW.

- (84) ~~Designated States (unless indicated otherwise, for each available type of national protective right):~~  
~~ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO,~~

~~SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).~~

**Published:**

~~With International Search Report.~~

~~Reference is made for an explanation~~ Field of the two-  
~~letter codes and the other abbreviations to the Guidance~~  
~~Notes on Codes and Abbreviations in the front section of~~  
~~each regular PCT Gazette edition.~~ Invention

### ~~Device for Damping Water Hammer~~

The present invention relates to a device for damping water hammer in hydraulic accumulators, piston-type accumulators in particular, ~~a device which is a~~. A component of the accumulator ~~and which~~ acts as a throttle on the flow of fluid ~~which is~~ established between parts of the interior of the accumulator and a hydraulic network to which the accumulator may be connected, ~~the~~. The throttle being is formed by at least one transfer area of a specifiable cross-section in a valve component ~~which when~~. When in one of its valve positions, the valve interrupts the flow of fluid up to the respective transfer area ~~and in~~. In its other valve position, the valve essentially releases the flow of fluid.

### Background of the Invention

Hydraulic accumulators are readily available commercially in a plurality of embodiments. The essential applications of such hydraulic accumulators are in energy storage, emergency operation, oil leakage compensation, and in energy accumulation and pulsation damping. The most frequently encountered structural forms of hydraulic accumulators are ones with a separating member, ~~a~~. A distinction is made between bladder accumulators, diaphragm

accumulators, and piston accumulators, as a function of the separating member employed. The mode of operation of all these accumulators is based on utilization of the compressibility of a gas for accumulation of a fluid, nitrogen often serving as energy carrier. Thus, ~~hydropneumatic~~ Hydropneumatic accumulators ~~consist of~~ include a fluid component and a gas component, and have a gas-tight separating element. The fluid component is connected to the hydraulic network, so that the gas on the gas side in the accumulator is compressed as the pressure increases. Analogously, the compressed gas in the accumulator can expand in the event of a pressure drop on the network side and the accumulated hydraulic fluid is forced back into the network as a result.

The conventional structure of a piston-type accumulator is characterized by an outer cylindrical tube as accumulator housing into which a piston with its compression system is introduced so as to be longitudinally displaceable. Sealing covers on the front sides of the accumulator housing delimit two operating spaces in the accumulator, one of which receives the gas and the other of which is connected to the hydraulic network ~~so as to~~ conduct fluid.

Damping devices (e.g., diaphragm accumulators SB 0210-0,32E2 manufactured by Hydac) ~~have already been proposed for the purpose of reducing~~ reduce water hammer inside a hydraulic accumulator; ~~at~~ At the fluid inlet side of the accumulator, these damping devices have a valve component which may be displaced in the longitudinal direction of the accumulator ~~and said~~ The devices are an integral component of the accumulator. The valve component is guided in a valve housing, and is provided with a fluid transfer area. If a water hammer comes from the direction of the hydraulic network, this water hammer reaches the fluid connection area of the hydraulic accumulator ~~and the~~ The water hammer in the hydraulic network closes the valve component against the internal fluid pressure of the accumulator ~~and the~~ The valve component comes into closing contact with the valve housing. However, as before, but now in throttled form, fluid from the hydraulic network reaches the interior of the accumulator, that is,

the fluid side, ~~by way of~~ via a central passage bore as transfer area situated in the valve component.

The water hammer is reduced as a result of the respective throttling of the flow of fluid with the valve component closed by the transfer area in the form of the longitudinal bore, ~~but, as~~ . As before, fluid in a smaller amount now continues to flow into the interior of the accumulator. In the opposite situation, that is, when the fluid pressure decreases on the hydraulic network side, the accumulator pressure effects opening of the valve component and fluid flows from the interior of the accumulator housing through cleared larger opening cross-sections in the valve component, ~~and~~ . An additional portion of the flow of fluid ~~being~~ is conducted over the transfer area in the form of a throttle. As a result of configuration of the throttle position in the disclosed solution in the form of a bore of short channel length, turbulences and accordingly cavity phenomena occur on the material components of the valve components and/or accumulator housing adjoining the transfer area. However, in addition to the harmful cavity action, the turbulences also cause disruption of the flow of fluid into and out of the accumulator; ~~this~~ . This situation may have an adverse effect on the energy balance as a whole of accumulators, as well as of the hydraulic network. In addition, opening and closing of the valve component is associated with a relevant generation of noise, something which may exert a very disruptive effect on operation of such hydraulic assemblies.

DE 102 14 871 A1 discloses a device for damping water hammer, in particular a device in the form of a pressure medium accumulator having a housing ~~the~~ . The housing interior of ~~which is subdivided into two chambers by a medium separation element, the~~ . The first chamber ~~being is filled with a gas and the~~ . The second chamber is filled ~~with a fluid, and there being provided in~~ . In a hydraulic connection, a bottom valve which permits filling of the second chamber with fluid and prevents complete emptying of the second chamber, the . The sealing element of which the second chamber may be operated by the medium separation element. In



addition, means ~~have been~~ are provided for throttling the pressure medium volume ~~to be~~ introduced during the process of filling the second chamber, which means ~~which~~ release the full pressure medium volume flow only after the bottom valve has been fully opened.

~~On the basis of this prior art the~~

#### Summary of the Invention

~~An object of the present invention is further to improve the disclosed to provide an improved damping devices to the end that device avoiding emission noise is avoided to the greatest possible extent in operation, and so that improving the overall energy balance of the respective reservoir solutions is improved, and does not result resulting in material-damaging cavity phenomena. The~~

~~This object as thus described is is basically attained by means of a device having the characteristics claimed in patent claim 1 in its entirety.~~

~~In that, as specified in the characterizing part of claim 1, the respective transfer area is being provided with a funnel-shaped enlargement on at least one of its free ends, the. The enlargement being is oriented in the direction of the interior of the accumulator or the hydraulic network, because. Because of the funnel effect, there is a distinct reduction of noise emission during operation, especially in damping the individual water hammer in the hydraulic network. However, not~~ Not only does the funnel-shaped enlargement result in noise reduction, but in addition the water hammer introduced into the transfer area is controlled by fluid mechanics ~~means~~ so that turbulences and accordingly cavity phenomena on the valve component are prevented. ~~It has also been found that the~~ The funnel-shaped enlargement for the respective transfer area on the whole improves the laminar flow behavior of the fluid into or out of the

accumulator. This arrangement exerts an effect on the operation of a hydraulic assembly which is favorable with respect to the overall energy balance.

In one preferred embodiment of the damping device ~~claimed for the~~ of the present invention ~~provision is made such that,~~ the respective transfer area is in the form of central channel in the valve component, ~~a.~~ A funnel-shaped enlargement being is present at both ends of the central channel. In addition, preferably only one transfer area is present in the valve component along its longitudinal axis. The ~~indicated~~ central channel may be configured to be suitably large on the basis of its overall length, ~~this having a.~~ This configuration has a favorable effect on the overall flow behavior inside the transfer area in the two funnel-shaped enlargements mounted on the ends.

In another preferred embodiment of the damping device ~~claimed for the~~ of the present invention, the valve component is configured as a valve piston having web-shaped extensions on one of its ends. ~~The pertinent extension webs.~~ The web extensions permit reliable guidance of the valve component in its valve housing or along parts of the accumulator in the area of the fluid connection area. By ~~preference~~ preferably, the web-like extensions are ~~for this purpose~~ guided on the external circumference side by cylindrical guide surfaces along the valve component housing by which the valve component may be fastened to one end of the accumulator housing.

The damping device ~~claimed for the~~ of the present invention, ~~which consists~~ is formed essentially of a valve component guided in a valve housing together with the transfer area having funnel-shaped enlargements mounted on ~~the end sides,~~ is in the form of ~~its ends.~~ A variable-throttle system ~~which makes it possible to close~~ permits closing the valve component when fluid enters the accumulator in one direction as a function of the water hammer and to initiate throttling of the water hammer by the transfer area, ~~the.~~ The path for the fluid being is essentially opened in the opposite direction through opening of the valve component to

unimpeded flow of fluid from the interior of the accumulator into the hydraulic network. The possibility also exists, however, of reversing the installation sequence indicated, in particular in that the valve component is mounted so as to be rotated through 180° in its valve housing, with the result that then throttling of flow out of the accumulator in the direction of the hydraulic network is effected by closing the valve component and by way of the transfer area. On the other hand, when fluid flows in the opposite direction into the accumulator from the hydraulic network, the flow moves essentially unimpeded along the web-like extensions, the free fluid cross-section of the throttle-like transfer area also being taken into consideration.

Other advantageous embodiments of the damping device claimed for the invention are specified in the other dependent claims. Other objects, advantages and salient features of the present invention will become apparent from the following detailed description, which, taken in conjunction with the annexed drawings, discloses a preferred embodiment of the present invention.

The invention is described below with reference to the drawing, in which, in diagrammatic form not drawn to scale, Brief Description of the Drawings

FIG. 1 shows a longitudinal section through the 1 is a side elevational view in section of damping device built into the fluid connection area of a hydraulic accumulator not shown, in particular one in the form of a piston-type accumulator; according to an embodiment of the present invention; and

FIG. 2 is an exploded perspective view of the essential components of the damping device, consisting of of FIG. 1, comprising a valve housing and the valve component.

Detailed Description of the Invention

The device, according to an embodiment of the present invention, illustrated in the drawings, serves to dampen water hammer in hydraulic accumulators, in particular hydraulic accumulators of conventional design, ~~only~~. Only a part of an accumulator housing wall 10 of a piston-type accumulator which may also form the cover component of a conventional accumulator housing ~~being~~ is shown in FIG. 1. The structure of piston-type accumulators is generally known in the state of the art; ~~it~~ or is conventional. It is described in detail, for example, in AHydrauliktrainer, @ Volume 3, published by Mannesmann-Rexroth AG. A part 10 of the accumulator housing ~~as a whole~~ is illustrated in FIG. 1; ~~the~~. This pertinent section relates to the fluid inlet area 12 of the accumulator ~~and by~~. By a connection area 14, the fluid inlet area 12 of the accumulator housing 10 may be connected to a hydraulic network not specified in detail or shown having additional hydraulic units such as ones in the form of operating cylinders, hydropumps, or the like. The relevant structure and connection of accumulators to hydraulic networks is sufficiently well known in the prior art, and accordingly will not be discussed in detail at this point. Between fluid inlet area 12 and connection area 14, the volume of the chamber of the accumulator is increased for mounting a valve component designated as a whole as 16. This valve component 16 may be displaced longitudinally over a specifiable distance in a cylindrical valve housing 18 ~~which~~. Housing 18, as viewed in the line of sight to FIG. 2, is provided on its upper end with threading 20 for insertion of the valve housing 18 by screw connection along the interior wall of the accumulator housing 10 ~~(not shown in FIG. 1)~~. FIG. 1 also relates to a longitudinal section through the valve component 16 with valve housing 18, which is illustrated in an exploded view in FIG. 2.

The ~~indicated~~ valve component 16 may accordingly be used to act on the flow of fluid ~~which is established~~ between components of the interior of the accumulator and the hydraulic network, that is, between the fluid inlet area 12 and the connection area 14 to the network. For the purpose of this action, the valve component 16 has along its longitudinal axis 22, which is

equal in extent to that of the longitudinal axis of the accumulator housing 10, a single transfer area 24 in the form of a central channel. This central channel has on both of its ends a funnel-shaped enlargement 26, 28, ~~the~~. The upper funnel-shaped enlargement 26 as viewed in the line of sight to FIG. 1 ~~being~~ is enlarged in the direction of the fluid inlet area 12 to communicate with the latter. The other funnel-shaped enlargement 28 on the opposite lower end widens in the form of a funnel in the direction of the connection area 14 to the hydraulic network (not shown). In addition, the overall length of the two enlargements 26, 28 as measured in the direction of the longitudinal axis 22, is somewhat smaller than the overall length of the cylindrical central channel extending between the two enlargements 26, 28 and forming the transfer area 24. In addition, the largest diameter selected for the respective enlargement 26, 28 is smaller than the diameter of the adjacent associated fluid inlet area 12 and connection area 14. Use of the enlargements 26, 28 avoids formation of transitional areas of material with sharp edges, something which, among other things, has an effect favoring low noise emission behavior.

~~As is also to be seen in FIG. 2, the valve component 16 is configured as a valve piston which, as viewed in the line of sight to FIG. 2, is provided on its lower end with three web-like extensions 30. As viewed in the circumferential direction of the valve component 16, all three web-like extensions 30 are spaced at constant or equal intervals from each other. As is to be seen in the illustration of the longitudinal section, only the extension web 30 on the far right in FIG. 1 as viewed in the line of sight to FIG. 2 is illustrated, along with a front view of the following extension web 30, the~~. The respective area viewed ~~being~~ is designated as 32 in the figures. The web-like extensions 30 are provided on the outer circumference ~~sidesides~~ with partial cylindrical guide surfaces 34 ~~which~~. Surfaces 34 permit sliding of the valve piston along the inner circumference 36 of the cylindrical valve housing 18. The valve component 16 is provided on both of its ends opposite each other with level sealing surfaces 38, 40 ~~the~~. The ~~upper one of which~~ sealing surface 38, as viewed in the line of sight to FIG. 1, may be brought into contact with ~~an also a~~ a level contact surface 42 of the valve housing 18, ~~that is, be made to~~

adjoin the web-like extensions 30 on the opposite, lower, side. In addition, the partial structural length of the valve component 16 together with the transfer area 24 makes up more than one half the overall structural length of valve component 16, together with the extension webs 30.

As is also to be seen in FIG. 2, the valve component 16 is outfitted on the outer circumference side with a level surface, in the area of the transfer area and extending between the extension webs 30, ~~with level~~. Level surfaces 44 which, together with the cylindrical inner circumferential surface 36 of the valve housing 18, delimit three fluid outlets 46 (see FIG. 1). The web-like extensions 30 also end in a common horizontal plane which extends in parallel with the sealing surfaces 38 and 40 of the valve component 16. The valve component 16 may move inside its valve housing 18, as a function of the pressure and flow relationships, downward along its longitudinal axis 22 from its closed position illustrated in FIG. 1 into an opened position in which the free ends of the extension webs 30 come into contact with the lower sealing wall 48 of the accumulator housing 10, which delimits the connection area 14 on the edge side in this region. The respective axial path of displacement is, as is illustrated in FIG. 1, somewhat shorter than the height of one of the funnel-shaped enlargements 26, 28.

In the operating position shown in FIG. 1, a water hammer has occurred in the connection area 14 over the hydraulic network and has moved the valve component 16 into its closing position shown in FIG. 1, ~~in which~~. In this position, the sealing surface 38 is in contact with the contact surface 42 of the valve housing 18. Transfer of fluid from the connection area 14 to the fluid inlet area 12 and so into the interior of the accumulator housing 10 thus is effected exclusively ~~by way of~~ via the throttle-like transfer area 24 with its two funnel-shaped enlargements 26, 28. The respective throttle area ~~both~~ reduces the water hammer, so that it can have no damaging effect in the interior of the accumulator housing 10, ~~and the~~. The continuously extending enlargements 26, 28 guide the flow of fluid over the central channel as transfer area 24 so that harmful cavity effects are prevented in the edge areas of the valve

component 16 or of the fluid inlet area 12. In addition, the long guide path of the central channel permits achievement of a laminar value of the flow of fluid, so that losses of flow are prevented; something which in turn, The laminar flow has a favorable effect on the overall energy balance of the hydraulic system (not shown). The funnel-shaped enlargements 26, 28 have the additional effect that the pressure of the highly laminar flow in the central channel is relaxed, ~~this having a~~. This relaxation has a favorable effect on noise emission, and the. The average expert in the sphere field of hydraulic systems and hydraulic accumulators is surprised to learn that by employing the indicated enlargements 26, 28 ~~he achieves~~, a noise reduction is achieved such that persisting residual noises are barely perceptible by the personnel operating the hydraulic assembly.

If the hydraulic water hammer and accordingly the hydraulic pressure on the connection area 14 drop when the valve component 16 is in the customary installed position, it is forced downward as viewed in the ~~line of sight to FIG. 1~~ by the force of gravity and the interior pressure remaining in the hydraulic accumulator ~~and the~~. The free ends of the web-like extensions then come into contact with the lower sealing wall 48. Consequently, the path is cleared for passage of fluid from the fluid inlet area 12 to the fluid outlet 46, ~~and thus fluid~~. Fluid may then move from the interior of the accumulator and then over the spaces between the web-like extensions 30 in the direction of the connection area 14 and from this area back into the hydraulic network. Division of the flows of fluid among the three fluid outlets 46 is then effected, ~~it being~~. That flow is limited by the outer circumference of the valve component 16 and its central recess in the form of the transfer area 24. Consequently, the free opening cross-section corresponds in effect to the fluid cross-section without valve component 16, so that the process of transfer of hydraulic energy from the interior of the accumulator housing to the hydraulic network is essentially free of loss.

The unit described is configured as a variable-throttle design and the possibility exists of introducing the valve component 16 can be introduced into the valve housing 18 transversely to the longitudinal axis 22 after rotation through  $180^\circ$ , so that then the web-like extensions 30, as viewed in the line of sight to FIG. 1, extend in the direction of the accumulator and so in the direction of the fluid inlet area 12 and the sealing surface 38 of the valve component 16 points in the direction of the connection area 14. In this situation, provision may then be made in the case of specific accumulator design solutions such that a water hammer coming from the hydraulic network may reach the connection area 14 over the three fluid outlets 46 and reach the interior of the accumulator unimpeded, a part of the flow in turn reaching by way of reaches via the transfer area 24, while the process of discharge of fluid from the accumulator is damped in that the valve component 16 with its sealing surface 38 seals off the connection area to the hydraulic network 14 and fluid. Fluid is transferred exclusively by way of the throttling transfer area 24 with its funnel-shaped enlargements 26, 28. Thus, in essence, with the installed position of the accumulator designed as variable throttle reversed, water hammer coming from the accumulator, the piston-type accumulator in particular, can be reduced. The damping device claimed for of the the present invention thus creates an overall system which may be adapted to different applications and specified values without extensive conversion measures.



---

Claims

While one embodiment has been chosen to illustrate the invention, it will be understood by those skilled in the art that various changes and modification can be made therein without departing from the scope of the invention as defined in the appended claims.

What is claimed is:

DEVICE FOR DAMPING WATER HAMMERAbstract of the Disclosure

~~\_\_\_\_\_ A device for damping~~damps ~~water hammer~~hammers in hydraulic accumulators, in particular in ~~piston-type accumulators~~ in particular, a device which is a ~~.~~  
The device is embodied in the form of the accumulator ~~component of the accumulator~~  
and ~~which acts~~operates as a throttle on the ~~flow of fluid which is~~  
~~established~~a fluid flow and is inserted between parts of the ~~interior~~internal  
elements (12) of the accumulator and a hydraulic network (14) to which the accumulator ~~may~~  
~~be connected,~~ is connectable. The ~~throttle being~~ is formed by at least one transfer  
area (24) ~~of specifi~~able having a predetermined cross-section in a valve  
~~component~~element (16) which when in one of its valve positions ~~interrupts~~  
the fluid ~~flow of fluid up to the respective transfer area (24) and when in its~~  
~~other valve position essentially at one of the valve positions and~~ releases the  
flow, ~~characterized in that the respective~~ it at its other position. The  
transfer area (24) ~~is provided~~has at least one free end with a funnel-shaped enlargement  
(26; 28) ~~on at least one of its free ends and in that the~~  
~~enlargement (26; 28) is oriented in the direction of the interior~~  
~~(12) towards the inside of the accumulator (12) or of~~towards the hydraulic network (14),  
thereby substantially improving damping such that noise emission is reduced to the greatest  
possible extent.

2. ~~The damping device as claimed in claim 1, wherein the respective transfer area (24) is in~~  
~~the form of a central channel in the valve component (16) and wherein the funnel-shaped~~  
~~enlargement (26; 28) is present on both ends of the central channel.~~

3. — The damping device as claimed in claim 1 or 2, wherein the valve component (16) is configured as a valve piston having web-like extensions (30) on one of its ends.
4. — The damping device as claimed in claim 3, wherein the valve component (16) is guided on the outer circumference side by cylindrical guide surfaces (34) along a housing (18) by which the valve component (16) may be fastened on one end of the housing (10) of the accumulator.
5. — The damping device as claimed in claim 4, wherein the valve component (16) is provided on the outer circumference side and between the extension webs (30) with level surfaces (44) which, in conjunction with the cylindrical inner circumferential surface (36) of the valve housing (18), delimit fluid outlets (46).
6. — The damping device as claimed in claim 4 or 5, wherein the valve component (16) is provided on the end side with level sealing surfaces (38, 40), the sealing surface (38) of which may be brought into contact with an also level contact surface (42) of the valve housing (18) or the surface which adjoins the web-like extensions (30).
7. — The damping device as claimed in one of claims 3 to 6, wherein the partial structural length of the valve component (16) with the transfer area (24) amounts to more than one half of the total structural length of the valve component (16) with the extension webs (30).
8. — The damping device as claimed in one of claims 2 to 7, wherein the funnel-shaped enlargements (26, 28) extend from the valve component (16) along level sealing surfaces (38, 40).

9. ~~The damping device as claimed in one of claims 4 to 8, wherein the valve housing (18) is provided on the outer circumference side with threading (20) for fastening to parts of the accumulator housing (10).~~